



The new degree of comfort.™



Water

Residential Gas

Professional Classic Direct Vent
Water Heaters for Manufactured Housing

Professional *Classic*® Direct Vent gas water heaters for Manufactured Housing provide maximum design freedom

Efficiency

- .59 - .60 UEF

Performance

- FHR: 64 gallons for 40-gallon model and 51 gallons for 30-gallon model
- Recovery: 30.3 GPH at a 90° F rise

Flexibility

- Field convertible controls for natural gas or LP operation included
- No external door is required
- Provides maximum design freedom since it can be placed anywhere within the home
- Hot water outlet located at top
- Cold water inlet at side for fast, economical hook-up

Altitude Certification

- All models certified up to 10,000 ft. above sea

Low Emissions

- Eco-friendly burner, low NOx design
- Meets 40 ng/J NOx requirements



Adjustable Roof Jack Vent

Design allows adjustment to roof pitches of up to 5/12". Four roof jacks available to accommodate roof thickness of 12" up to 95".

Direct Combustion Air Inlet

Air is drawn directly into combustion chamber through air inlet fixed to base; 1/2" screen for rodent protection.

Roof Jacks

12" Non-Adjustable & Air Inlet	AP12032E
15-32" Adjustable & Air Inlet	AP12032B
30-60" Adjustable & Air Inlet	AP12032C
48-95" Adjustable & Air Inlet	AP12032D

Air Inlets

6" Non-Adjustable	AP12019B
11-22" Adjustable	AP12017B

Extension Pipe Kit

Roof Jack Extension Pipe Kit	AP12021
------------------------------	---------

Roof jack and air inlet must be ordered separately with 30 and 40-gallon direct vent models and must be in accordance with instructions furnished with the heater. No other roof jack or air inlet assemblies are approved for installation with this heater. Clamps and secure strapping are packed in water heater carton.

Longer Life

- Premium grade anode rod provides long-lasting tank protection

Plus...

- Certified for manufactured (HUD) and modular construction
- Piezo ignition – easy light pilot
- Enhanced flow brass drain valve
- Factory installed temperature and pressure relief valve – side location
- Low lead compliant
- EverKleen™ patented system fights sediment build-up

Warranty

- 6-Year limited tank and parts warranty*

*See Residential Warranty Certificate for complete information

Units meet or exceed ANSI requirements and have been tested according to D.O.E. procedures. Units meet or exceed the energy efficiency requirements of NAECA, ASHRAE standard 90, ICC Code and all state energy efficiency performance criteria.



Professional *Classic* Direct Vent for Manufactured Housing

30 and 40-Gallon Capacities

Up to 30,000 Btu/h

Natural and LP Gas



See specifications chart on back.



INTEGRATED HOME COMFORT



The new degree of comfort.™




Residential Gas
Professional Classic Direct Vent
Water Heaters for Manufactured Housing

Professional Classic® Direct Vent for Manufactured Housing Specifications

DESCRIPTION				FEATURES				ROUGHING IN DIMENSIONS (SHOWN IN INCHES)								ENERGY INFO.		
T Y P E	NOMINAL GALLON CAPACITY	RATED GALLON CAPACITY	MODEL NUMBER	GAS INPUT IN THOUS. BTU/H NAT./LP	RECOVERY IN G.P.H. 90° F RISE NAT./LP	UEF FIRST HR. DEL. G.P.H. NAT./LP	EF FIRST HR. DEL. G.P.H. NAT./LP	HEIGHT TO VENT A	TANK HEIGHT B	DIAM. C	HT. TO GAS CONN. D	VENT SIZE E	ROOF JACK VENT SIZE F	HT. TO SIDE T&P VALVE G	HT. TO WATER CONN. H	SHIP WT. (LBS)	ENERGY FACTOR	UNIFORM ENERGY FACTOR (UEF)
Tall	30	29	PROG30-30N RH63 MH DV	30	30.3	51	49	56-5/8	56-5/8	17-3/4	14-1/8	3	5	51-1/8	20	110	0.63	0.60
Tall	40	38	PROG40-30N RH62 MH DV	30	30.3	64	64	57-3/8	57-3/8	19-3/4	14-1/8	3	5	51-1/8	20	125	0.62	0.59

Uniform Energy Factor, Energy Factor and rated gallon capacity based on Department of Energy (DOE) requirements.

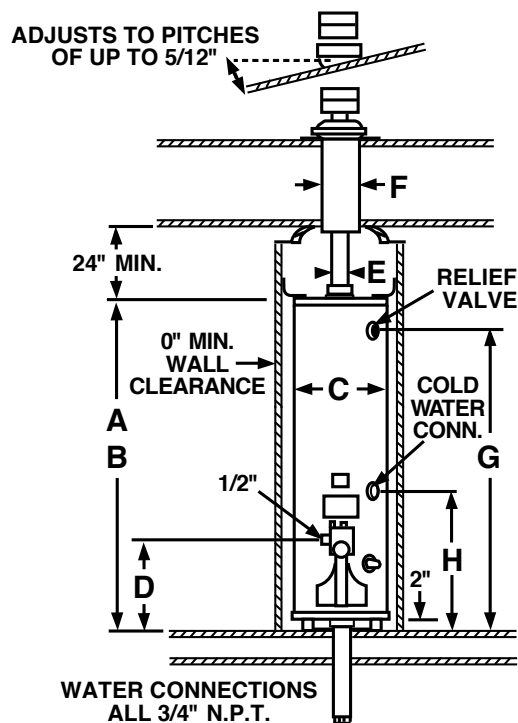

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Water Heating • 101 Bell Road
Montgomery, Alabama 36117-4305 • www.rheem.com



INTEGRATED HOME COMFORT